

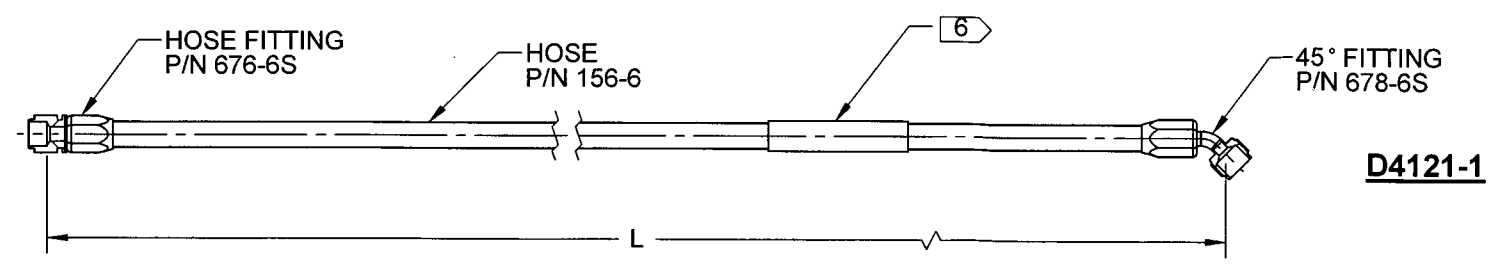


8 7 6 5 4 3 2 1

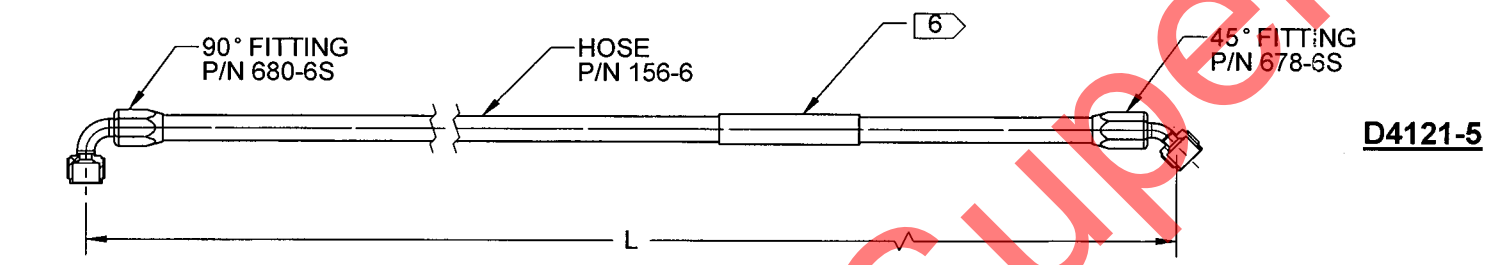

HOSE SPECIFICATION			
DART P/N	STRATOFLEX P/N	VENDOR	L
D4121-1	156003-6S0274	API	27.50
D4121-3	156003-6S0570	API	57.00
D4121-5	156062D1054S0	API	105.50

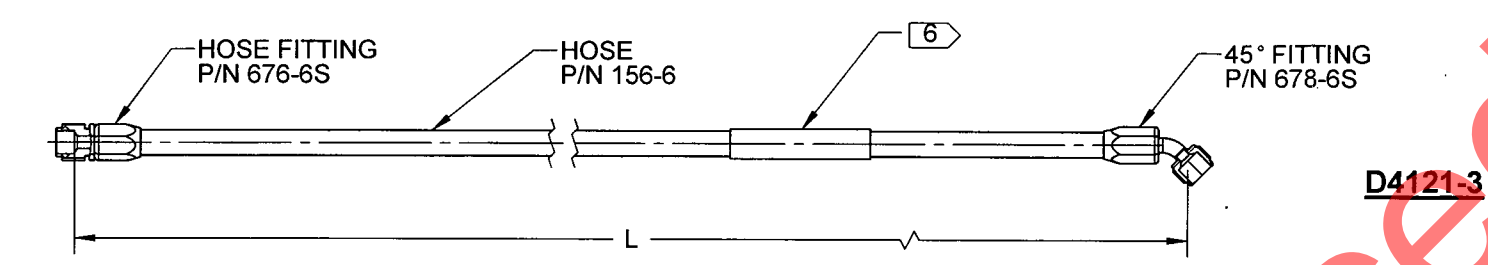

Superseded

- NOTES:  
1) MATERIAL: N/A  
2) FINISH: N/A  
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED  
4) UNITS: INCHES UNLESS OTHERWISE NOTED  
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX  
6) IDENTIFICATION: IDENTIFY WITH DART P/N & B/N USING D2729-1 LABEL INSTALLED WITH D2182-045 HEAT SHRINK  
7) WEIGHT: N/A  
8) HOSE ASSEMBLIES TO MEET THE REQUIREMENTS OF TSO-C53a TYPE "A"

RELEASED  
2010-09-23  
md

A	NEW ISSUE	RF	10.09.16
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE USA, INC. PORT HADLOCK, WA	
DRAWN	RF		
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	RF	D4121	SHEET 1 OF 1
APPROVED	RF	TITLE	SCALE
DE APPR.	RF	HOSE ASSEMBLIES	NTS
DATE	10.09.16	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

8 7 6 5 4 3 2 1